




TOWER CRANE

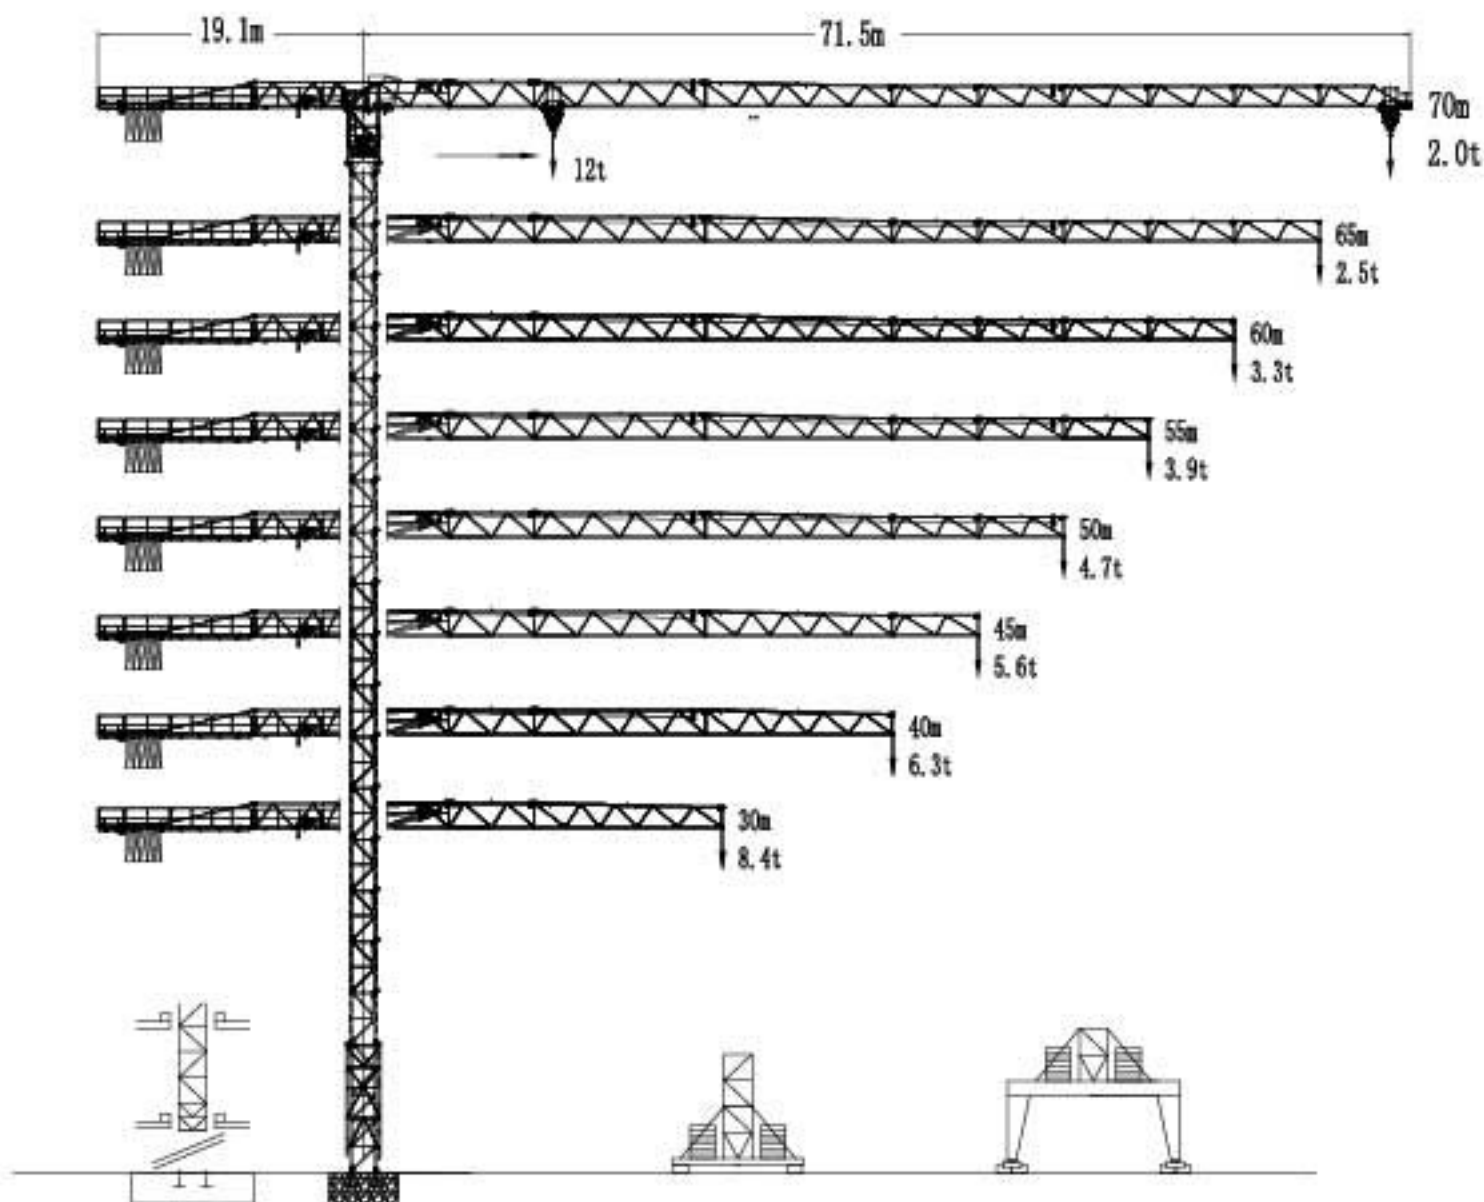

塔身截面 Mast 2mx2m

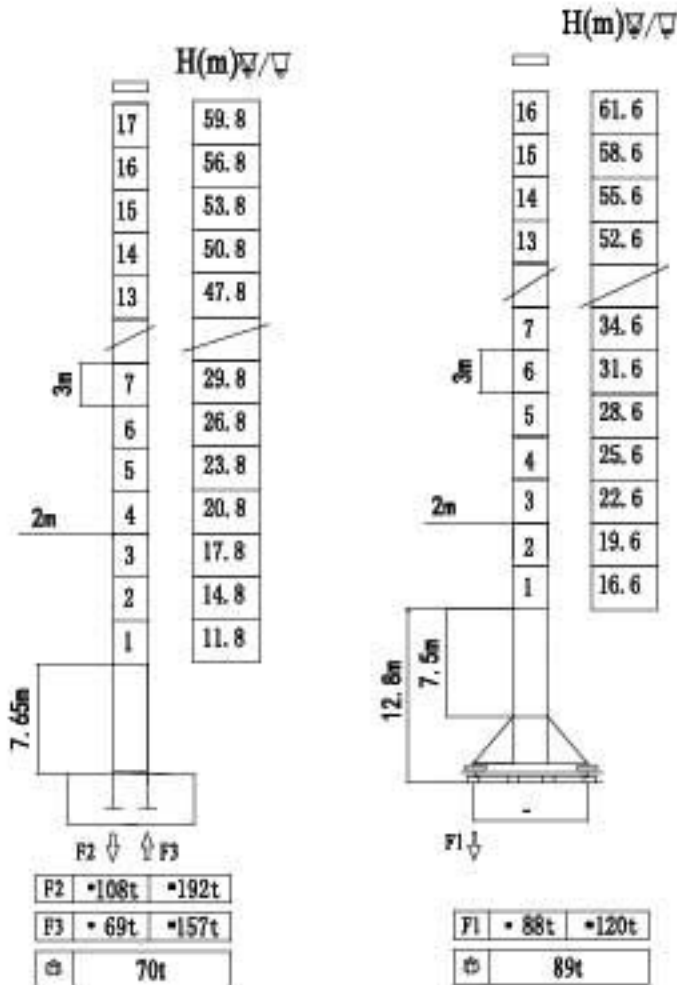

可变换的其它安装方式 Mounting possibilities

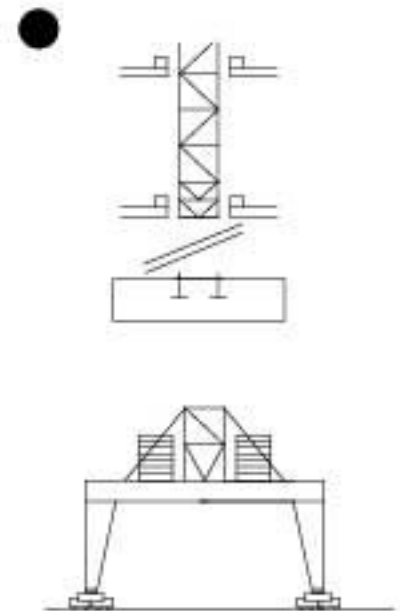

● 同我们协商
Consult us

F 反力 Reactions

- 工作状态 In service
- 非工作状态 Out of service


⊕ 自重 Self-load
不带载荷及配重, 最大臂长及标准高度时的自重

Without load and counter-weight with longest jib and standard height




固定式附着高度 Stationary anchorage height

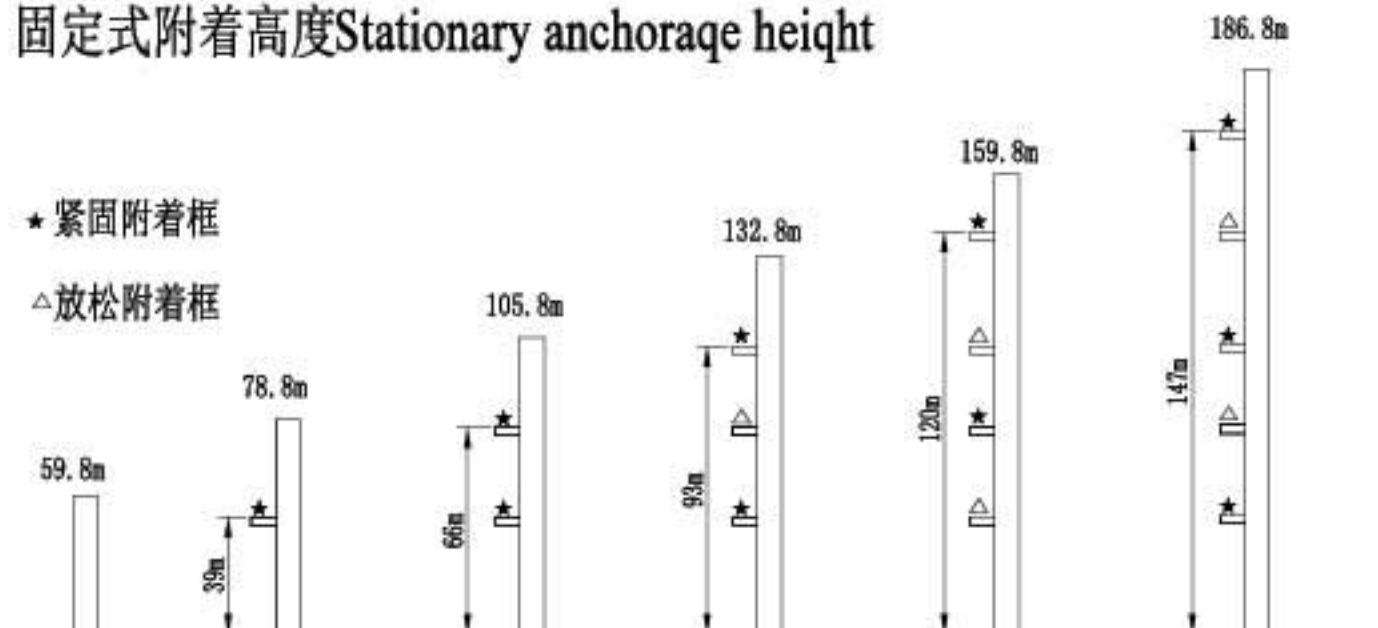


★ 紧固附着框




△ 放松附着框









载荷特性 Load diagrams




3.0—	16.7	20	25	30	35	40	45	50	55	60	65	70	m
	12	10	7.7	6.3	5.2	4.1	3.5	3.0	2.6	2.2	2.0	1.7	t
70m 	3.0-31.7					40	45	50	55	60	65	70	m
	6					5.5	4.4	3.8	3.3	2.9	2.5	2.3	t




3.0—	18	20	25	30	35	40	45	50	55	60	65	m
	12	10.6	8.2	6.7	5.3	4.5	3.8	3.3	2.9	2.5	2.2	t
65m 	3.0-33.9				35	40	45	50	55	60	65	m
	6				5.6	4.8	4.1	3.6	3.2	2.8	2.5	t




3.0—	19.3	20	25	30	35	40	45	50	55	60	m
	12	11.5	8.7	7.2	6.0	4.9	4.3	3.8	3.3	3.0	t
60m 	3.0-36.3				40	45	50	55	60	m	
	6				5.3	4.6	4.1	3.6	3.3	t	

3.0—	20.2	25	30	35	40	45	50	55	m
	12	9.3	7.5	6.4	5.3	4.6	4.1	3.6	t
55m 	3.0-37.8				40	45	50	55	m
	6				5.6	4.9	4.4	3.9	t



3.0—	21.3	25	30	35	40	45	50	m
	12	10	7.9	6.6	5.4	4.7	4.4	t
50m 	3.0-			39.1	40	45	50	m
	6				5.7	5.0	4.7	t








3.0—	21.5	25	30	35	40	45	m
	12	10.1	8.4	7.2	6.3	5.3	t
45m 	3.0-			42.3	45	m	
	6				5.6	t	

3.0—	21.9	25	30	35	40	m
	12	10.3	8.4	7.2	6.3	t
40m 	3.0-			40	m	
	6				t	

3.0—	22.3	30	m
	12	8.4	t
30m 	3.0-30		m
	6		t

标准小车可使用2/4倍绳率。(使用四倍绳率时, 应从二倍率的载荷中减去0.3吨)

Standard trolley 2/4 fall.(When using  subtract 0.3t from the loads 




机构特性 Mechanisms specification							 (m)	电机 (kw) Motor	
			m/min	t	m/min	t			
起升 Hoisting		45LVF30	70.4	2.5	35.2	5.0	600	45	
			52.8	3.8	26.4	7.6			
			35.3	6.0	17.6	12.0			
变幅 Trolleying			65m/min					185Nm	
回转 Slewing		RCV145	0 - 0.67 r/min					2x145N.m	
行走 Travelling		RT443	12.5-25					4x3.4	
电源 Mains supply			380V/50HZ 440V/60HZ						
供电容量 Necessary electric power			96.5 KVA						

以上参数可按用户要求配置

执行标准 Voluntary Standards: GB/T13752

The related parameters could be configured according to clients requests

塔机配重表Crane ballast

		
70m	L=19.1m	21t
65m	L=19.1m	21t
60m	L=19.1m	21t
55m	L=19.1m	19t
50m	L=19.1m	18t
45m	L=19.1m	16t
40m	L=19.1m	14t
30m	L=19.1m	11t

Contract Information:

Tel:0086-24-88901098 Fax:0086-24-88095022
 Email: info@cn-zcjj.com
 Office Address:308 room, Fengjingruige building,
 code 256, Dongbei damalu, Dadong District, Shenyang,
 China
 Post Code:110044
 Factory Address:The north of Huanggu Industry,
 Shenyang City, Liaoning Province, China.
 Website: www.zcjjtowercrane.com

沈阳正创建筑机械有限公司

联系方式:

电话: 024-88901098

传真: 024-88095022

邮箱: info@cn-zcjj.com

地址: 沈阳市大东区东北大马路256号