







TOWER CRANE

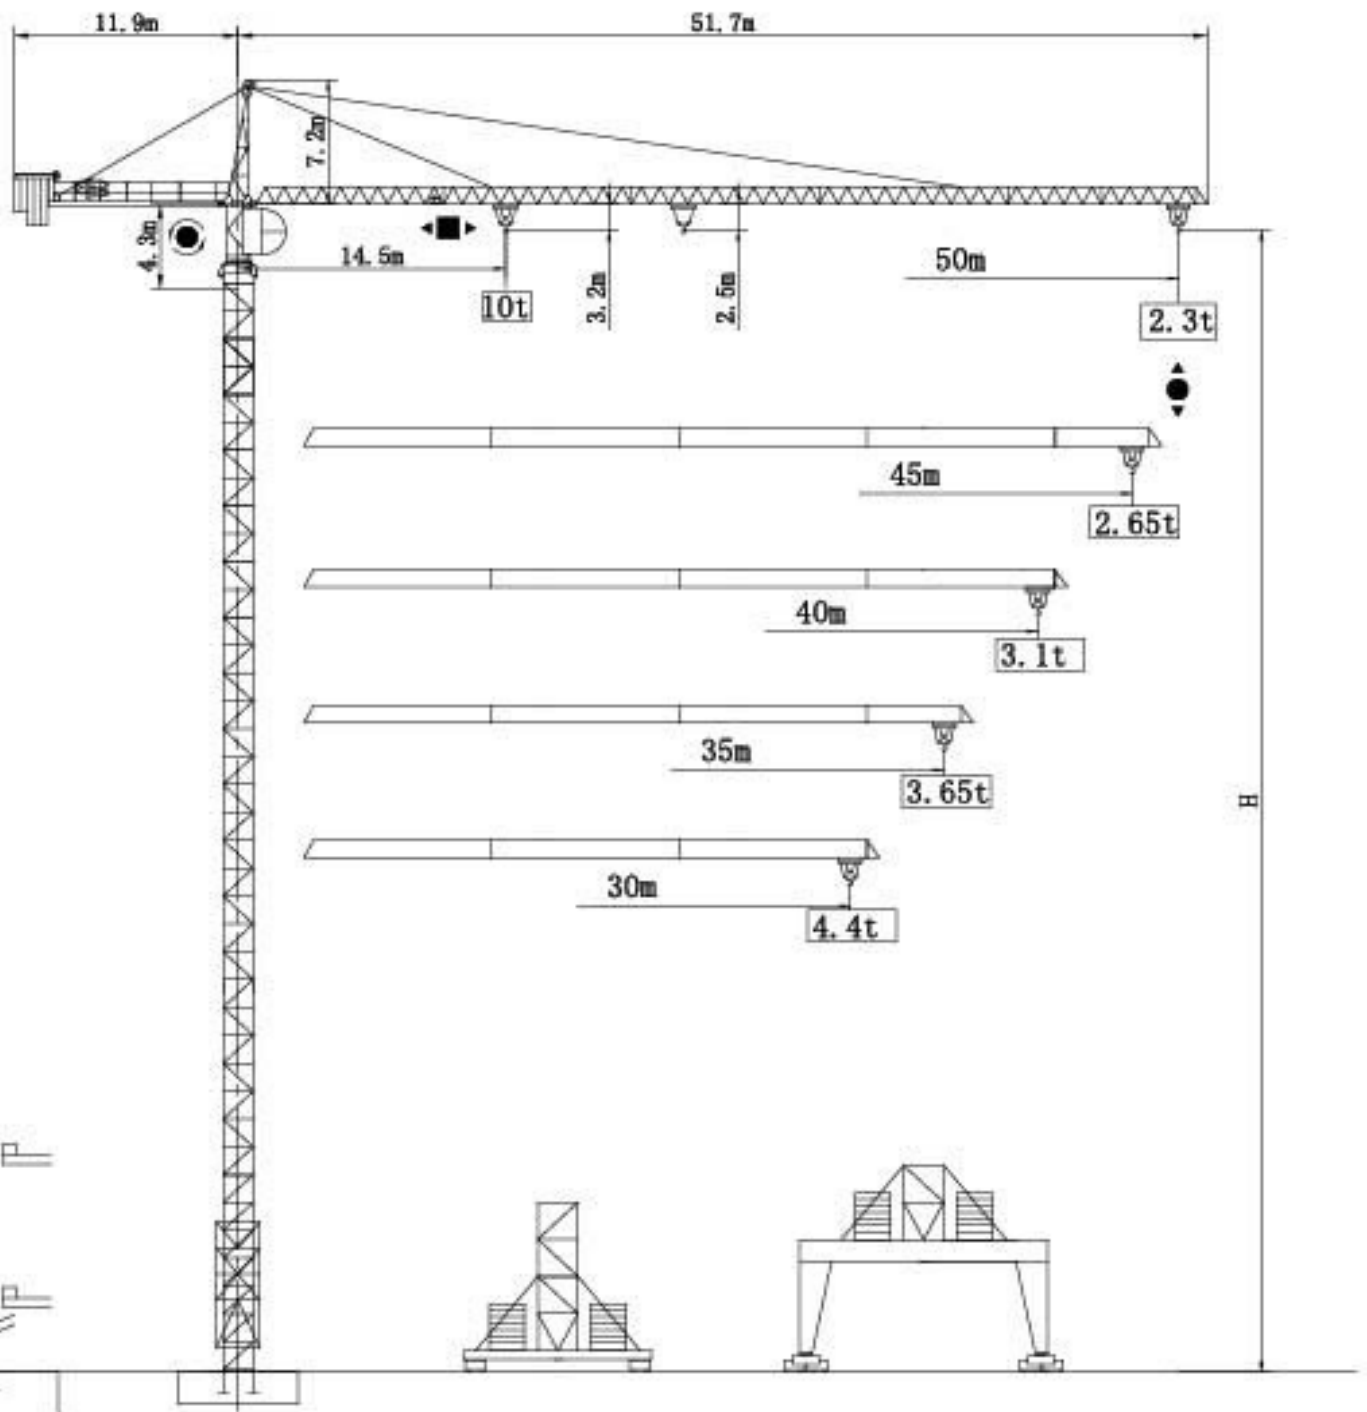


通过ISO9001国际质量体系认证

Our products have been awarded of ISO9001

载荷特性 Load diagrams

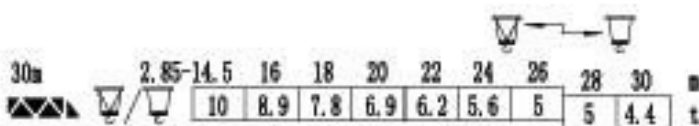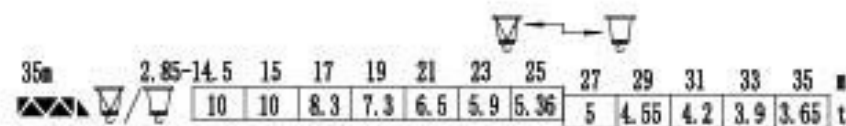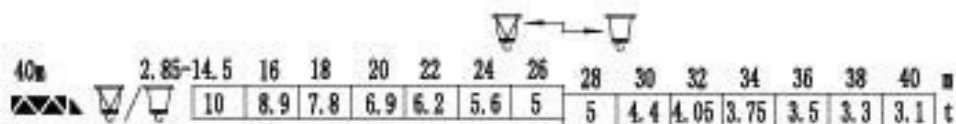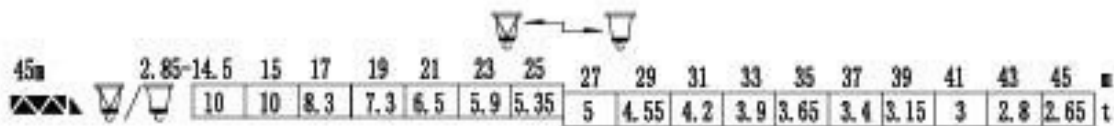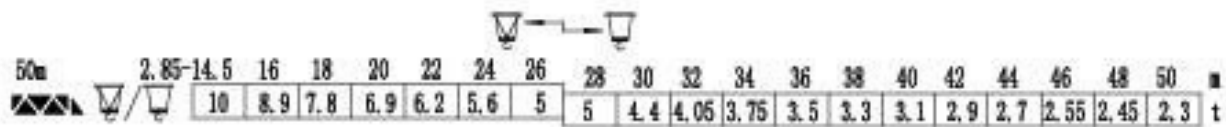

$$\nabla = \nabla - 0.1t$$

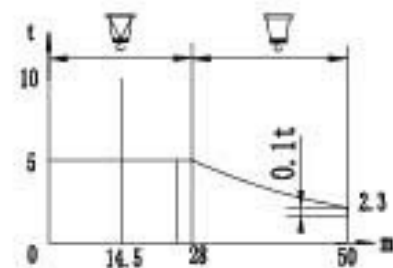

▽/▽ 标准小车可使用2/4倍绳率。(使用四倍绳率时, 应从二倍率的载荷中减去0.1吨)

Standard trolley 2/4 fall. (When using ▽ subtract 0.1t from the loads ▽)


Stationary anchorage height

★ 紧固附着框






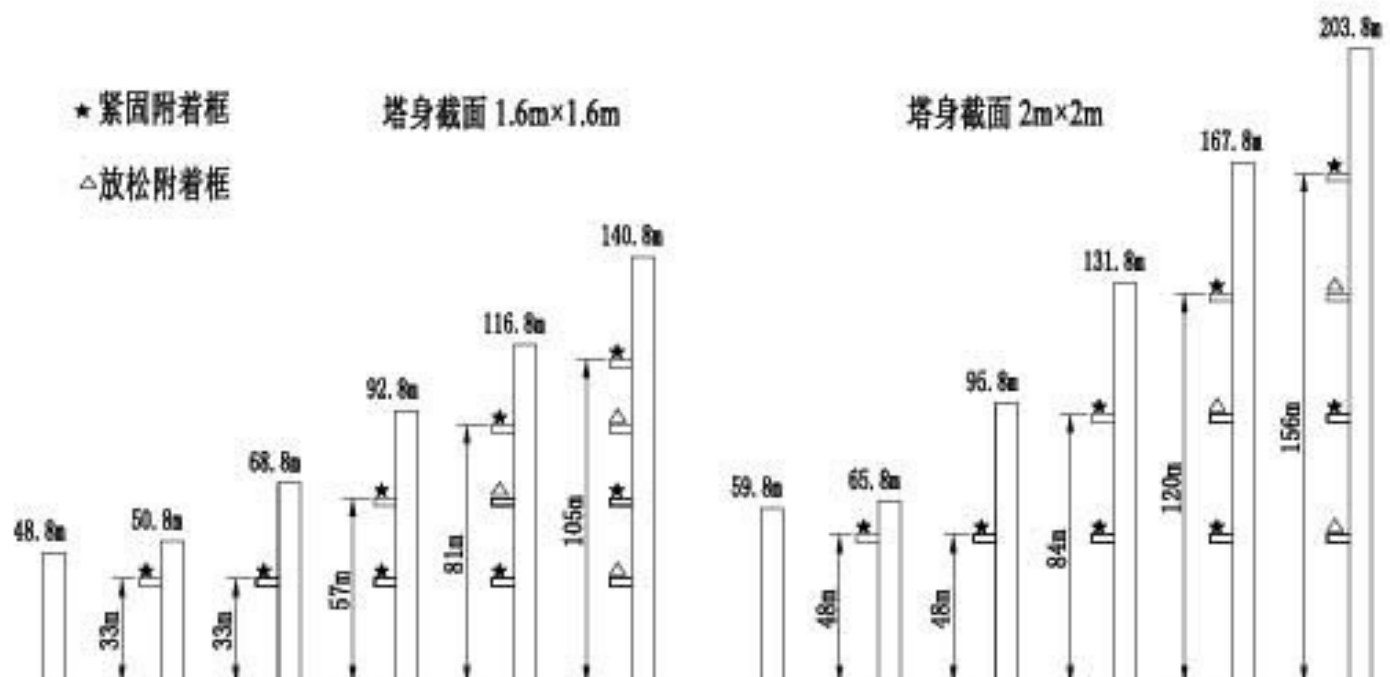


塔身截面 1.6m×1.6m

塔身截面 2m×2m

△ 放松附着框



机构特性 Mechanisms specification




起升 Hoisting								电机 (kw)	
			m/min	t	m/min	t			
		70RCS25	0-40	5.0	0-20	10.0	486m	51.5	
			0-80	2.5	0-40	5.0			
		45LVF25	0-36	5.0	0-21	10.0	600m	45	选择型 Optional winch
0-72	2.5		0-42	5.0					
0-108	1.25		0-54	2.5					
变幅 Trolleying		4T3V4	7.5/28/57			95Nm			
		4TVF	0-55m/min			4		选择型 Optional winch	
回转 Slewing		RCV95	0-0.7 rpm			2x95Nm			
		S.SSVF	0-0.7 rpm			2x5.5		选择型 Optional winch	
行走 Travelling		4TRVF	0-12 m/min			4x4			
电源 Mains supply			380V/50HZ 440V/60HZ						
供电容量 Necessary electric power			90 KVA						

以上参数可按用户要求配置

执行标准 Voluntary Standards: GB/T13752

The related parameters could be configured according to clients requests

塔机配重表 Cranc ballast

		
50m	L=11.9m	16.1 t
45m	L=11.9m	14.8 t
40m	L=11.9m	13.6 t
35m	L=11.9m	10.5 t
30m	L=11.9m	9.3 t

运输 Shipping

塔身 Tower	高度 (m) HH (m)	集装箱数量 Container QTY			
		FR	40'OP	40'HQ	20'GP
L46A	44.8			4	1
L68A	59.8	1		4	

Contract Information:

Tel: 0086-24-88901098 Fax: 0086-24-88095022

Email: info@cn-zcjj.com

Office Address: 308 room, Fengjingruige building, code 256, Dongbei damalu, Dadong District, Shenyang, China

Post Code: 110044

Factory Address: The north of Huanggu Industry, Shenyang City, Liaoning Province, China.

Website: www.zcjjtowercrane.com

沈阳正创建筑机械有限公司

联系方式:

电话: 024-88901098

传真: 024-88095022

邮箱: info@cn-zcjj.com

地址: 沈阳市大东区东北大马路256号