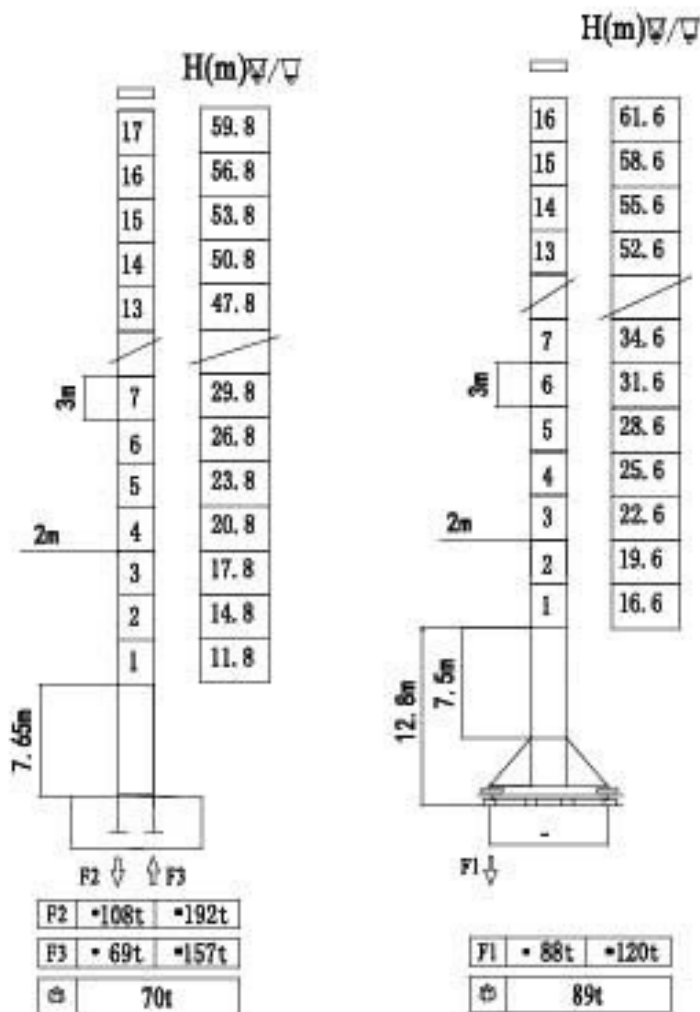
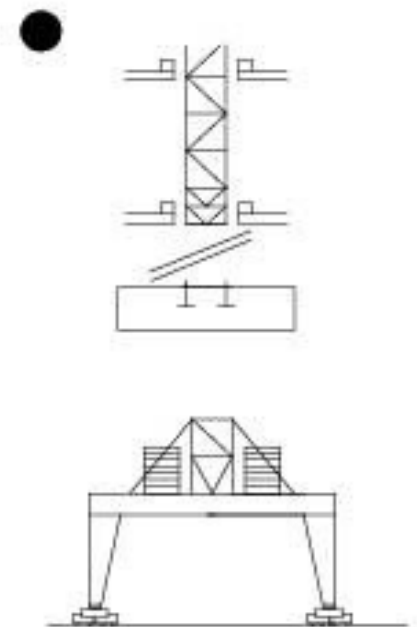


塔身截面 Mast 2mx2m



可变换的其它安装方式 Mounting possibilities



● 同我们协商
Consult us

F 反力 Reactions

● 工作状态 In service
■ 非工作状态 Out of service

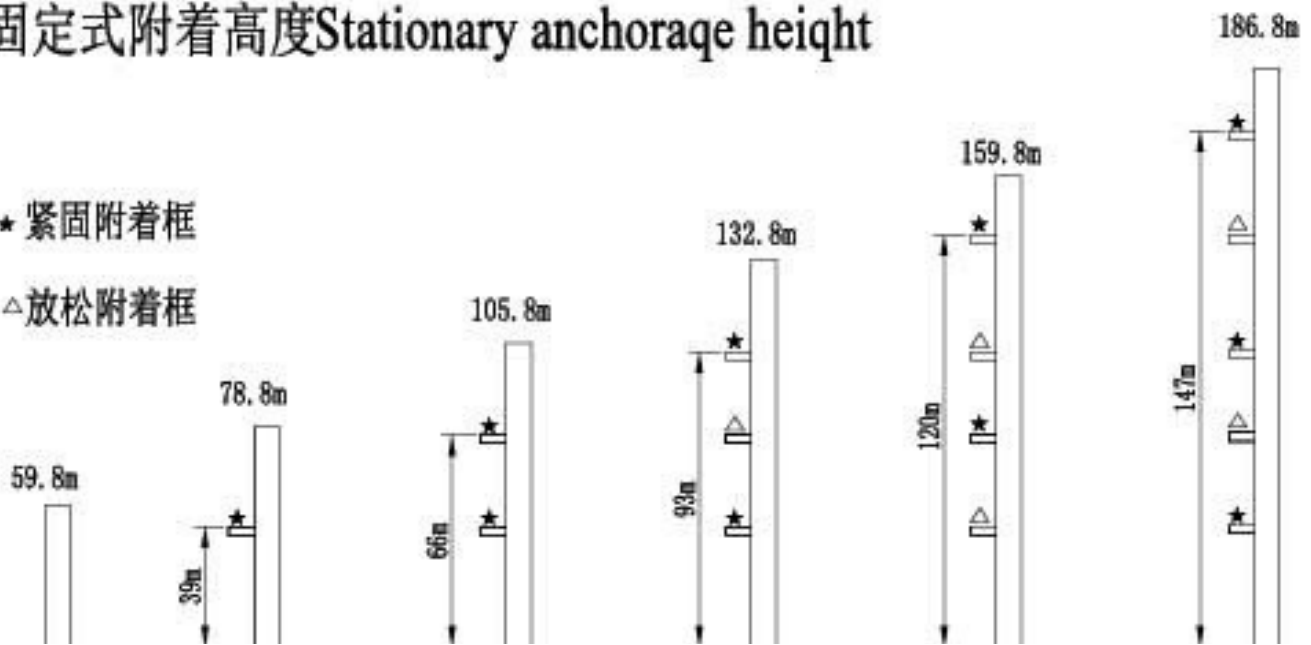
⊙ 自重 不带载荷及配重, 最大臂长及标准高度时的自重
Self-load

Without load and counter-weight with longest jib and standard height




固定式附着高度 Stationary anchorage height




★ 紧固附着框




△ 放松附着框









载荷特性 Load diagrams




3.0—	20	25	30	35	40	45	50	55	60	65	70	m
	10	7.7	6.3	5.2	4.1	3.5	3.0	2.6	2.2	2.0	1.7	t
70m 	3.0-36.4			40	45	50	55	60	65	70	m	
	5			4.4	3.8	3.3	2.9	2.5	2.3	2.0	t	




3.0—	21	25	30	35	40	45	50	55	60	65	m
	10	8.2	6.7	5.6	4.5	3.8	3.3	2.9	2.5	2.2	t
65m 	3.0-39			40	45	50	55	60	65	m	
	5			4.8	4.1	3.6	3.2	2.8	2.5	t	




3.0—	22	25	30	35	40	45	50	55	60	m
	10	8.7	7.2	6.0	5.2	4.3	3.8	3.3	3.0	t
60m 	3.0-41			45	50	55	60	m		
	5			4.6	4.1	3.6	3.3	t		

3.0—	23	25	30	35	40	45	50	55	m
	10	9.1	7.5	6.4	5.6	4.6	4.1	3.6	t
55m 	3.0-44			45	50	55	m		
	5			4.9	4.4	3.9	t		



3.0—	24	30	35	40	45	50	m
	10	7.9	6.6	5.7	5.0	4.4	t
50m 	3.0-			48	50	m	
	5			4.7	t		

3.0—	25.2	30	35	40	45	m
	10	8.4	7.2	6.3	5.6	t
45m 	3.0-			45	m	
	5			t		

3.0—	25.2	30	35	40	m
	10	8.4	7.2	6.3	t
40m 	3.0-			40	m
	5			t	

3.0—	25.2	30	m
	10	8.4	t
30m 	3.0- 30		m
	5		t

标准小车可使用2/4倍绳率。(使用四倍绳率时, 应从二倍率的载荷中减去0.3吨)

Standard trolley 2/4 fall.(When using  subtract 0.3t from the loads )




机构特性		Mechanisms specification						
							电机 (kw)	
		m/min	t	m/min	t			
起升 Hoisting		45LVF25	40	5	20	10	500m	45
			80	2.5	40	5		
		55RCS25	40	5	20	10	500m	41
			80	2.5	40	5		
		37RW	40	5	20	10	540m	37
			80	2.5	40	5		
变幅 Trolleying		120JXL	m/min	0-63				120Nm
回转 Slewing		RCV145	r/min	0-0.65rpm				2×145Nm
行走 Travelling		RT443	m/min	12.5-25				4×3.4
电源 Mains supply				380V/50HZ 440V/60HZ				
供电容量 Necessary electric power				61KVA/57KVA				

以上参数可按用户要求配置

执行标准 Voluntary Standards: GB/T13752

The related parameters could be configured according to clients requests

塔机配重表Crane ballast

		
70m	L=19.1m	21t
65m	L=19.1m	21t
60m	L=19.1m	21t
55m	L=19.1m	19t
50m	L=19.1m	18t
45m	L=19.1m	16t
40m	L=19.1m	14t
30m	L=19.1m	11t

Contract Information:

Tel:0086-24-88901098 Fax:0086-24-88095022

Email: info@cn-zcjj.com

Office Address:308 room,Fengjingruige building,
code 256,Dongbei damalu,Dadong District,Shenyang,
China

Post Code:110044

Factory Address:The north of Huanggu Industry,
Shenyang City,Liaoning Province,China.

Website: www.zcjjtowercrane.com

沈阳正创建筑机械有限公司

联系方式:

电话: 024-88901098

传真: 024-88095022

邮箱: info@cn-zcjj.com

地址: 沈阳市大东区东北大马路256号

TOWER CRANE

